

PC-35 MECHANICAL GROUND ROD CLAMP

This specification details the product PC-35 Mechanical ground rod clamp, developed for joining cables to copper clad steel ground rods through direct burial applications in earth and concrete, conductor range 8 AWG - 2/0 AWG, 1/2" to 5/8" Ground Rod, 3/8" stud.


Features

- Rated for direct burial in earth or concrete

General	
Material - Body	Copper alloy
Material - Stud	Steel
Plated	Y
Plating type	Bichromated (stud)

Dimensions	
Dimensions	1.28 in x 0.98 in x 1.77 in
Height	1.77 in
Length	1.28 in
Weight	0.201 lb
Width	0.98 in

Conductor Related	
Conductor - Copper Solid Size Range	8 AWG
Conductor - Copper Stranded Size Range	8 AWG - 2/0 AWG
Conductor - Rod Size	1/2 in - 5/8 in
Conductor Size	#8 AWG solid - 2/0 AWG stranded
Conductor Type	Rod-Size CU C Solid-Size
Conductor Diameter (Rod) - Maximum	0.625 in
Conductor Diameter (Rod) - Minimum	0.500 in
Conductor Diameter (Solid, stranded) - Maximum	0.129 in
Conductor Diameter (Solid, stranded) - Minimum	0.419 in
Conductor Diameter Range (Rod)	0.500 - 0.625 in
Conductor Diameter Range (Solid, stranded)	0.129 - 0.419 in

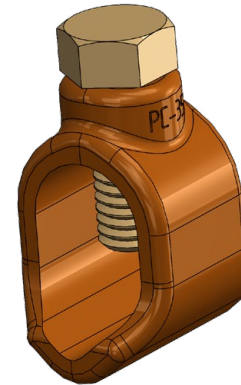

Representative image

Logistics	
Packaging Type	Box

Product Assets

Technical catalog of products
Sales Drawing - 3032220004
Specification - 3032220004